



Diode laser hair removal

Big Power: 1200w 1800w

Triple wavelength: 755nm 808nm 1064nm

For different skin type: white, brown, black

15 60,000 , 102 , ,
MLKJ——



Facial TIP!

diode laser hair removal



Easily treat areas that are normally hard to reach!

Improved Reach

This unique facial head allows you to reach areas of difficult access such as ears, nose, and interlining, among others.

ICE with cold Sapphire tip, protects the epidermis while keeping the heat in the dermis, where the follicles are located.

Facial TIP:

Specifications: Diode, 808 nm, Spot Size $\Phi 6$ mm



☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

□□□□ □□□□ □□□ □□□ □□□□□ □□□□□□ □□□□ □□□□!


□□□□□ □□□□□ □□□□□

[illegible]

□□□□ □□□□ , □□□□□□□□ , □□ , □□□□□□□□ □□□□ .

ICE 0000 00 000000 000 0000000000 00 0000 ,00 0000 000 00

□□□□□□ □□□□□□ □□, □□□□□□

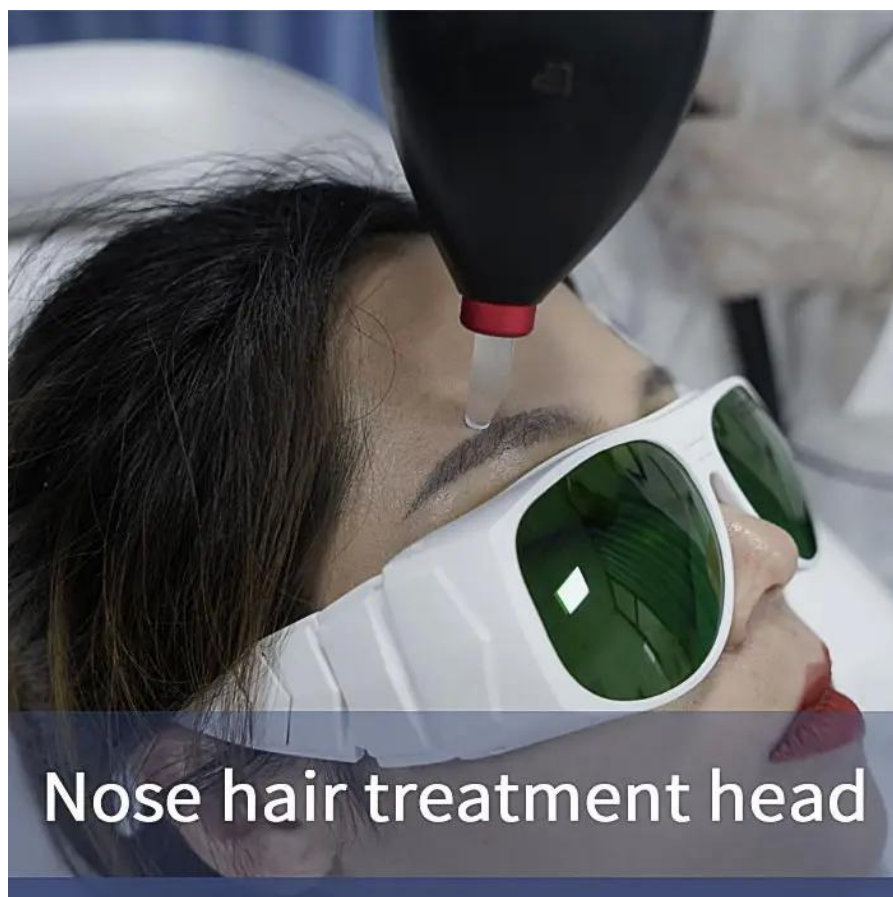



before



after



before

after



NEW PRODUCT PREFERENTIAL TO WINTER

**3 MINUTE
TREATMENT**

Painless and permanent hair removal

□□□□□ □□□□□□ □□□□ □□□□:


»».□□□□□ □□□□□ □□□ ,□□□□ □□□ ,□□□□□ □□□□□□□□ □□□□ □□□□□ □□□ :□□□□□□□
 □□□□ □□□□□ □□□ □□ □□□□□ □□□□ □□□□□ ,□"□ 38*12 □□□□□ □□□□□ □□□□□ :□□□□□««
 .□□□□ □□□ □□□□ ,□□□□□ □□□□ □□ □□ □□□□□ □□ □□ □□□□□□ □□□□□□□□ □□□□□□□□««
 □□□□□□□ □□□□□□ □□□□□□□ □□ □□□□□□□ □□□□□□□□ □□□□□□□□ ,°C5-3~ :□□□□□ □□□□□□□□□□ ««.

20-40 20-40

808

755

1064 ipl shr
opt laser/nd yag/alexandrite

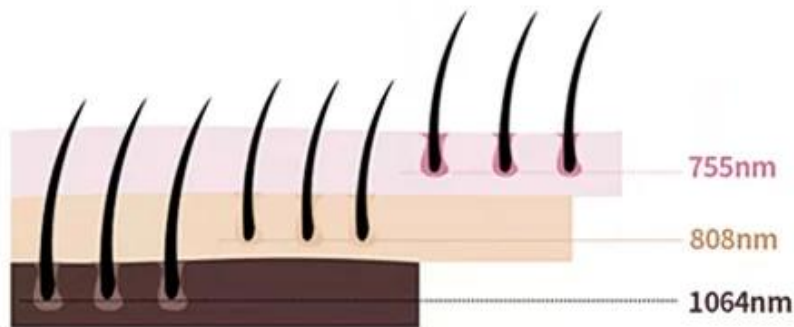

- 755nm for white skin (fine, golden hair removal)
- 808nm for yellow neutral skin (brown hair removal)
- 1064nm for black skin (black hair removal)



handle weighs only 350g

Available in **black or white**



1. 本装置は、レーザー光を発生させるための装置である。
 2. 本装置は、レーザー光を発生させるための装置である。

波長	808 nm 1200 nm 1200 nm 1200 nm
波長範囲	808 nm 1200 nm 1200 nm 1200 nm
波長精度	±14 nm
波長安定性	808 nm 1200 nm 1200 nm 1200 nm
波長変動	40 nm
波長変動率	10~150 j/cm2, 10~150 j/cm2
波長変動率	1-10Hz
波長変動率	TEC 制御
波長変動率	3000W
波長変動率	12*36 mm 24*12 mm 24*12 mm
波長変動率	110V/60HZ 220 V/50HZ 220 V/50HZ
波長変動率	46 mm
波長変動率	80 mm
波長変動率	53*40*105 mm
波長変動率	波長変動率 波長変動率 波長変動率

- 1) 波長変動率 波長変動率 波長変動率 波長変動率
- 波長変動率 6 mm (2)
- 波長変動率 波長変動率 波長変動率 波長変動率 ,波長変動率 波長変動率 波長変動率(3)

Frequency	Pulse	Energy	Total	Date
5	30	78	0	2023-05-08 11:25:11
5	30	78	0	2023-05-08 11:25:13
5	30	78	0	2023-05-08 11:25:17
5	30	78	0	2023-05-08 11:25:19

Multimedia Control System

Supports Bluetooth /Wifi /Remote control and locking/Cloud storage



Establishment Registration & Device Listing

FDA Home Medical Devices Databases



New Search

Back To Search Results

Establishment:

WEIFANG MINGLIANG ELECTRONICS CO.,LTD.
Floor 3, Building 4, Second Accelerator, Yuqing Eastern Street, High-Tech District
Weifang Shandong, CN 261000
Registration Number: 3007549439
FEI Number*: 3007549439
Status: Active
Date Of Registration Status: 2022

Owner/Operator:

Weifang Mingliang Electronics CO.,LTD.
Floor 3, Building 4, Second Accelerator, Yuqing Eastern Street, High-Tech District
Weifang, Shandong CN 261000
Owner/Operator Number: 10082104

Official Correspondent:

Pingping Lv
Floor 3, Building 4, Second Accelerator, Yuqing Eastern Street, High-Tech District
Weifang, Shandong CN 261000
Phone: 86-10-56335780

US Agent:

Wen Xu
4611 Maydew Mews Way Ellicott City MD
Ellicott, MD US 21042
Phone: 443 8968583 Ext
Email: Infor@Believe-Med.Com

* Firm Establishment Identifier (FEI) should be used for identification of entities within the imports message set

Page Last Updated: 05/09/2022

Note: If you need help accessing information in different file formats, see Instructions for Downloading Viewers and Players.

Language Assistance Available: Español | 繁體中文 | Tiếng Việt | 한국어 | Tagalog | Русский | العربية | Kreyòl Ayisyen | Français | Polski | Português | Italiano | Deutsch | 日本語 | فارسی | English

Packing

safe and thoughtful packaging service



Built-in prevention Collision bubble

Two-year warranty for machine handle as consumable,
one-year warranty.

OEM&ODM service for distributor.

Tight packaging

Training: (Video+Manual+Online Service)
Can Keep You Operate It Easily.



3-5 business days delivery

Professional guide:

24 Hours Professional online customer service,