

Co2 fractional laser vaginal tightening

Latest






Collagen contraction and remodeling



Pigmentation removal



Skin tightening

up

Forehead

Eyelid / Brow

Nasolabial folds

Cheek

Double chin



Glabellum

Front face

Neck

down



Vaginal tightening



Scar removal



Stretch mark removal

SKIN RECONSTRUCTION



Five therapeutic heads

Equipped with scanning head * 1 / cutting head * 1 / private head * 3

• Scanning head efficacy



Tender skin/shrink pores/remove striae gravidarum and chloasma

• Cutting head efficacy

Removing sarcoma / nevus

• Efficacy of private head


Tighten vagina / tender vulva / tender vulva

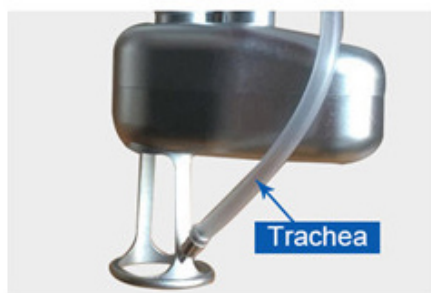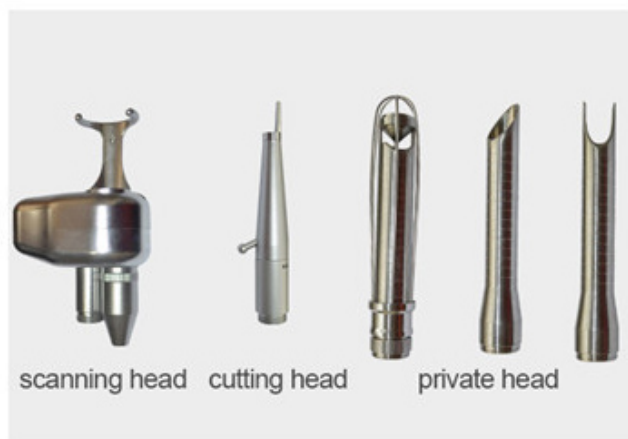

• Trachea



Adjustable dot shape and size

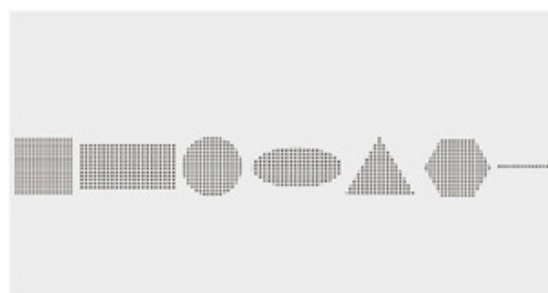

Shape display

Informacje o produkcie

Funkcja lasera frakcyjnego CO2:

1. Laserowe usuwanie zmarszczek 2. Laserowe usuwanie zmarszczek 3. Laserowe usuwanie blizn 4. Laserowa plastyka powiek 5. Inne zastosowania: Usuwanie znamion barwnikowych, ostudy, piegów, barwników starczych, brodawek, rogowacenia łojotokowego, syringoma, trądziku, prosaków, rozstępów ciąży; Kurczenie się porów; Napinanie skóry; Laserowy przeszczep włosów; Laserowe powiększanie piersi itp.



CO2 FRACTIONAL LASER CLEARLY DIFFERENT

BENEFITS



Shortest Pulse Duration,
Enabling High Peak Power



Improved ROI with Excellent Results in
Fewer Treatments



Unique Double Pulse Mode



Versatile Platform Enabling Multiple
Patient-Tailored Treatment Options



Supreme Feature-Set



I - VI Suitable for All Skin Types

CO2 FRACTIONAL LASER

vaginal tightening, skin resurfacing, scar removal




5 TREATMENT
HEADS



SHOW DETAILS

Pursue better in every detail

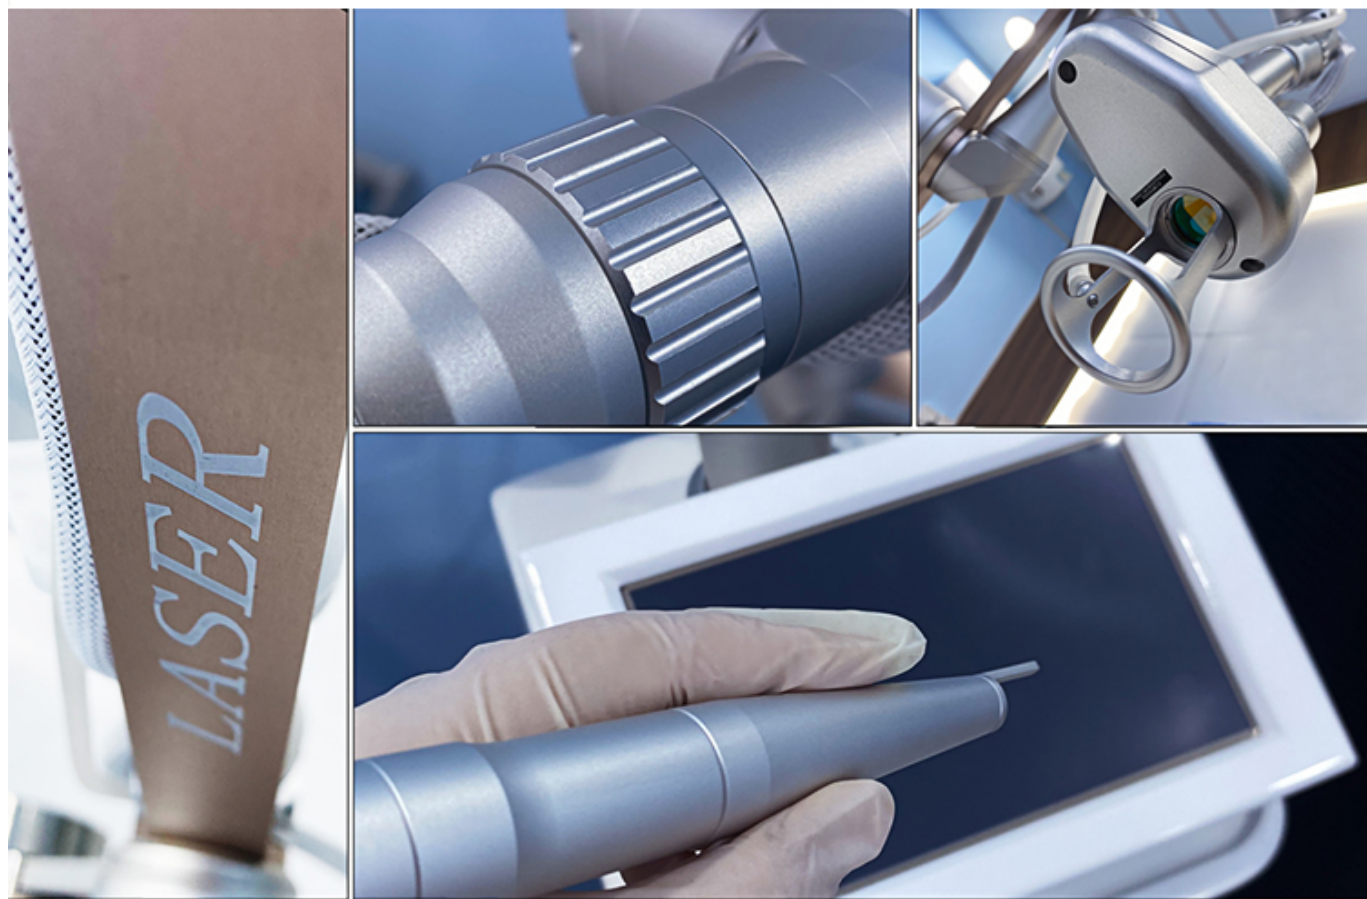


Work Theory


It concentrated thermal heating of the vaginal tissue inner layers induces collagen and elastine contraction and regeneration of these proteins in the longer term. These molecular signal activate the entire wound healing process of the body's local immune system. The treatment outcome is the complete remodeling of the vaginal tissue in addition to re-establishment of firm "young like" vaginal tissue embedded with string-like, thick and long collagen fibers.




1. Laser irradiation angle can be adjusted

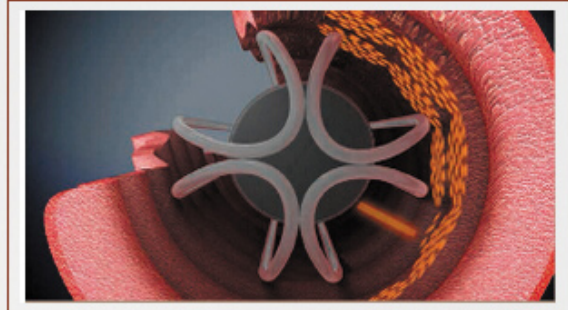

2. Laser irradiation can be rotated 360 degrees

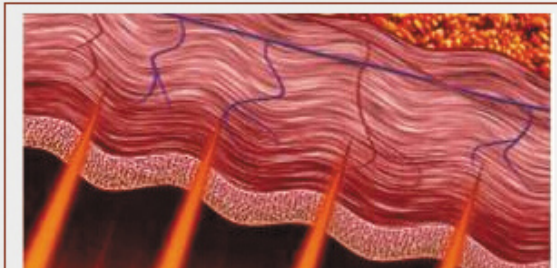

WORKING PRINCIPLE

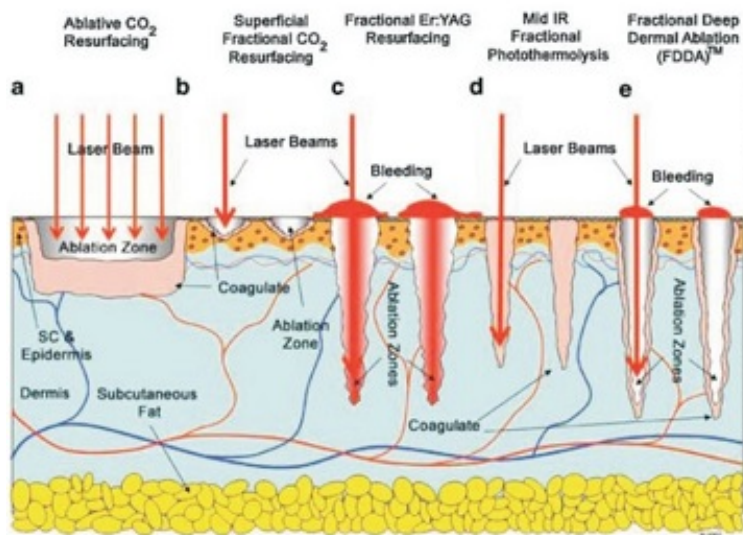

The CO₂ laser uses a unique head piece which tracks the CO₂ 10.6 μ m wavelength light as it passes light through its optical lens to penetrate the skin. We can control the depth of the penetration from only a few micrometers in depth (only as deep as a few sheets of paper) to much deeper with tiny thermal channels. This will also determine the length of healing, the number of treatments and the cost. Each thermal channel creates a small micro-injury but does not significantly disturb or disrupt the surrounding tissue.

Treatment effect comparison



before treatment



during treatment



after treatment



after 30days

Acne Scars



Hypertrophic Scars



Chicken Pox Scars



Burn Scars



Surgery Scars



Accident Scars



Wyświetlacz

14-calowy prawdziwy ekran dotykowy, 6 rodzajów skóry do wyboru

- * 14-calowy duży ekran dotykowy w prawdziwym kolorze
- * Super fajne wrażenia dotykowe
- * 6 języków do wyboru, można dodać specjalny język
- * Akceptowane są usługi OEM, takie jak regulacja parametrów, w tym energia/częstotliwość/szerokość impulsu
- * 12 rodzajów wzorców wyjściowych



14 inch 4K HD touch screen
One click start different function parameters
Easier system operation

Typ lasera	Laserowa maszyna dopochwowa Co2 Laser dopochwowa
Długość fali lasera	1060nm
Moc lasera	do 40 W (opcjonalnie)
Układ świetlny	7 wspólnych ramion
Czas trwania impulsu	100-5000us
Fakula	tryb pojedynczy
Skupiona średnica wiązki	0,25 mm
Obszar ogniskowy	0,05 mm2
Formularz wyjściowy	Ultra Puls, ułamkowy
Tryb pracy	Przerywane ładowanie
Tryb skanowania	Sekwencja, losowa, równoległa (przetaczana)
Skanowanie kształtów	Trójkąt/kwadrat/prostokąt/okrągły/owalny/sześciokątny/liniowy
Obszar diagramu	≤20mm * 20mm
Kolorowy ekran dotykowy interfejsu	14 cali
Układ chłodniczy	Chłodzenie powietrzem, chłodzenie wodą
Moc wejściowa	AC 230V±10%,50HZ/ AC 110V±10% 60HZ
Rozmiar plamki	≥0,2 mm w ognisku
Czas promieniowania / Czas przerwy	0,01 1 sek
Wiązka celująca	Promieniowanie podczerwone 635nm
Zasilacz	110/220 V 10% 60 HZ 6A